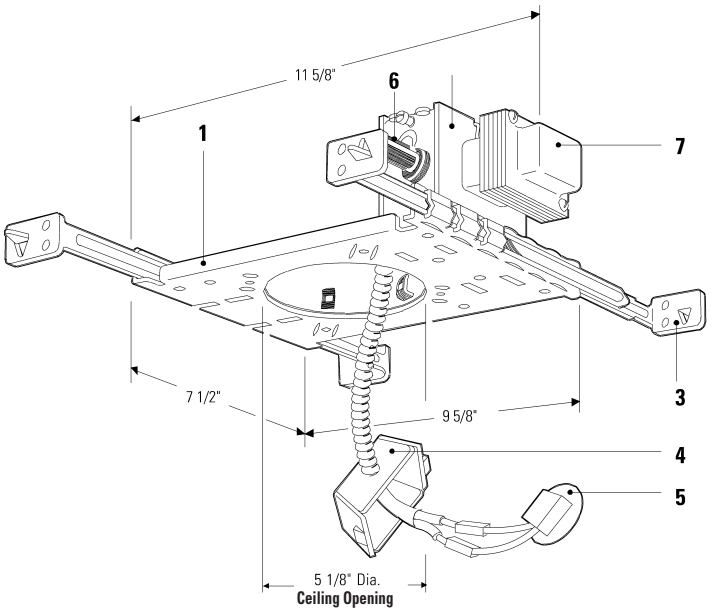


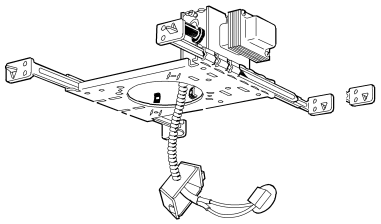

**FRAME-IN KIT**

**REFLECTOR TRIM**

**Complete Fixture consists of Reflector Trim & Frame-In Kit. Select each separately.**

| Frame-In Kit | Reflector Trims — See Individual Reflector Trim Specification Sheets | | | |
|---|---|---|---|---|
| | Adjustable | | | |
| **1000LV** | Baffles | Aperture Cone | Pinhole | Elbow |
| | **1055LV**<br>**1055WHLV** | **1056LV** **1064WDLV**<br>**1063LV** **1064WDPLV**<br>**1064LV**<br>**1064CDLV** | **1052LV** | **1062LV** |

## Features

1. **Mounting Frame:** .036" (#20 ga.) galvanized steel. Accommodates all ceilings up to 1" thick; including existing or inaccessible areas. Breakout section and anchor nails permits installation in existing ceilings from below. Push-in/twist-out rotoclips hold reflector flush to ceiling.
2. **Junction Box:** 4" x 3 1/2"x 2", .063" (#14 ga.) galvanized steel. U.L. listed for maximum of 8 No. 12 ga. 90° C through branch circuit conductors. Integral cable clamps permit attachment of nonmetallic Romex® or armored cable without need of additional connectors.
3. **Mounting Bars:** .059" (#16 ga.) galvanized steel. 13" long bars extend to 27" with integral nailing tabs. Attaches to wood joist without need of accessories.
4. **Socket Housing:** .036" (#20 ga.) galvanized steel.
5. **Socket:** Field replaceable. Two pin socket, pre-wired with #18 SF1 leads to junction box.
6. **Thermal Protector:** Meets NEC and UL requirements. Insulation must be kept 3" away from fixture sides and wiring compartments and must not be placed above fixture in a manner which will entrap heat.
7. **Transformer:** Outboard mounted, magnetic, 120V. primary, nominal 12V. secondary. Removable from below.

## Dimming

**Dimming Controls:** use only dimmers specifically designed for use with magnetic transformers, like Lightolier Onset®, Sunrise® series LV or VA dimmers, or any Lightolier Controls dimming system. Low voltage fixtures may produce audible sound when used with dimmers, which may be objectionable in acoustically critical areas.

## Options & Accessories

**Mounting Bars:** **1964** - 20" set of (2)
**T-Bar Ceiling Clips:** **1956** - set of (4)

## Options & Accessories (continued)

**Concealed Spline Ceiling Kit:** **1965** - set of (4), 1 1/2" to 2 1/2" Mtg. Ht.
**Plaster Ceiling Ring:** **1960** - 7/8" depth for wet plaster ceilings.
**Extra-Thick Ceiling Mounting Ring:** **1967B** - up to 2" thick ceilings.
**MR16 Socket Replacement:** **1975B**
**277V Remote Step-Down Transformer:** **7997** - 277V down to 120V 300W max. load.

## Labels

UL (Suitable for Damp Locations), I.B.E.W.

Romex® is a registered Trademark of General Cable Industries Inc.
**US Patent No.: 5,045,985**

**Job Information** **Type:**

**Job Name:**

**Cat. No.:**

**Lamp(s):**

**Notes:**

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • G1208